

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

5020-002

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

CONCERNING A FILING UNDER 35 U.S.C. 371

10/018330

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/GB00/01582

April 25, 2000

April 23, 1999

TITLE OF INVENTION

IMPROVEMENTS IN OR RELATING TO ABRASIVE FLAP DISCS

APPLICANT(S) FOR DO/EO/US

Paul MOSIER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Form PCT/RO/101 Form PCT/IPEA/401 Form PCT/IPEA/416 Form PCT/IPEA/408

February 21, 2001 Response to Written Opinion

Search Report under Section 17(5)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) <div style="font-size: 2em; font-weight: bold;">10/018330</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold;">PCT/GB00/01582</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">5020-002</div>
--	---	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 <div style="text-align: right; font-weight: bold;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY <div style="border: 1px solid black; height: 100px; width: 100%;"></div>	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				<div style="border: 1px solid black; padding: 2px;">\$890.00</div>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	20 - 20 =	0	x	\$0.00	
Independent claims	3 - 3 =	0	x	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$890.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$890.00	
				Amount to be: refunded	\$
				charged	\$

- a. ☒ A check in the amount of \$890.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-0925 A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Leonard D. Bowersox, Esq.
KILYK & BOWERSOX, P.L.L.C.
 3603-E Chain Bridge Road
 Fairfax, VA 22030
 Telephone: (703) 385-9688
 Facsimile: (703) 385-9719


 SIGNATURE

Leonard D. Bowersox

NAME

33,226

REGISTRATION NUMBER

October 23, 2001

DATE

Date October 23, 2001 Label No. EL 748964144 US

I hereby certify that, on the date indicated above, I deposited this paper with identified attachments and/or fee with the U.S. Postal Service and that it was addressed for delivery to the Assistant Commissioner for Patents, Washington, DC 20231 by "Express Mail Post Office to Addressee" service.

Leonard Boweiox 
Name (Print) Signature

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Paul MOSIER

U.S. Patent Application No.: Not yet assigned

Art Unit: Not yet assigned

Filed: October 23, 2001

Examiner: Not yet assigned

For: IMPROVEMENTS IN OR RELATING TO ABRASIVE FLAP DISCS

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

October 23, 2001

Sir:

Prior to examination of the above-identified new u.s. national Phase patent application, please amend the application as follows:

IN THE CLAIMS:

Please replace claims 4, 6, 7, and 10-17 with the revised version of those claims shown below:

4. An abrasive flap disc as claimed in claim 1, wherein the angle between the backing plate and each flap is in the range of approximately 20° to approximately 90°.

6. An abrasive flap disc as claimed in claim 1, wherein a centerline of each flap, which extends between its radially inner and outer edges, is substantially on a radius of the backing plate.

7. An abrasive flap disc as claimed in claim 1, wherein the centerline of each flap, which extends between its radially inner and outer edges, is at an angle relative to a radius of the backing plate.

10. An abrasive flap disc as claimed in claim 1, wherein the flaps comprise abrasive grit bonded to a backing material.

11. An abrasive flap disc as claimed in claim 1, wherein the backing plate includes means to attach the disc to a drive mechanism.

12. A method of producing an abrasive flap disc of the type set out in claim 1, comprising the steps of:

providing a backing plate;

providing an adhesive on an upper surface of the backing plate;

rotating the backing plate incrementally;

at each incremental step, feeding the end of a strip of abrasive material on to the adhesive on the backing plate;

severing the end of the strip to form a flap;

repeating the process until an annular array of flaps is formed on the backing plate with each flap, at least in a radially outer region, being spaced from each adjacent flap;

maintaining the flaps in spaced position; and

curing the adhesive to secure the flaps to the backing plate.

13. A method of producing an abrasive flap disc as claimed in claim 12, wherein after constructing the array of flaps and before curing, the method further includes the step of placing the disc in a former adapted to prevent each flap from falling into substantial contact with an adjacent flap.

14. A method of producing an abrasive flap disc as claimed in claim 13, wherein the former includes a cylindrical wall dimensioned to encircle the disc and prevent each flap from falling into substantial contact with an adjacent flap.

15. A method of producing an abrasive flap disc as claimed in claim 13, wherein a spoke-shaped frame is placed with a spoke positioned between adjacent flaps to prevent each flap from falling into substantial contact with an adjacent flap.

16. A method of producing an abrasive flap disc as claimed in claim 12, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially inner to outer edge and which is substantially on a centerline of the backing plate.

17. A method of producing an abrasive flap disc as claimed in claim 12, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially inner to outer edge and which is at an angle relative to a radius of the backing plate.

Preliminary Amendment
New U.S. Patent Application

Please add new claims 18-20 as follows:

- 18. A method of producing an abrasive flap disc, comprising the steps of:
- providing a backing plate;
 - providing an adhesive on an upper surface of the backing plate;
 - rotating the backing plate incrementally;
 - at each incremental step, feeding the end of a strip of abrasive material on to the adhesive on the backing plate;
 - severing the end of the strip to form a flap;
 - repeating the process until an annular array of flaps is formed on the backing plate with each flap, at least in a radially outer region, being spaced from each adjacent flap;
 - maintaining the flaps in spaced position; and
 - curing the adhesive to secure the flaps to the backing plate.
19. A method of producing an abrasive flap disc as claimed in claim 18, wherein after constructing the array of flaps and before curing, the method further includes the step of placing the disc in a former adapted to prevent each flap from falling into substantially contact with an adjacent flap.
20. A method of producing an abrasive flap disc as claimed in claim 18, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially inner to outer edge and which is at an angle relative to a radius of the backing plate.--

REMARKS


Applicants respectfully request favorable consideration of this application and the timely allowance of the pending claims.

The new claims are fully supported by the present specification and introduce no new matter.

Should the Examiner deem that any further action by applicant or applicant's representative is desirable or required, the Examiner is invited to telephone the undersigned at the number set forth below.

If there are any fees due in connection with the filing of this response, please charge the fees to Deposit Account No. 50-0925.

Respectfully submitted,

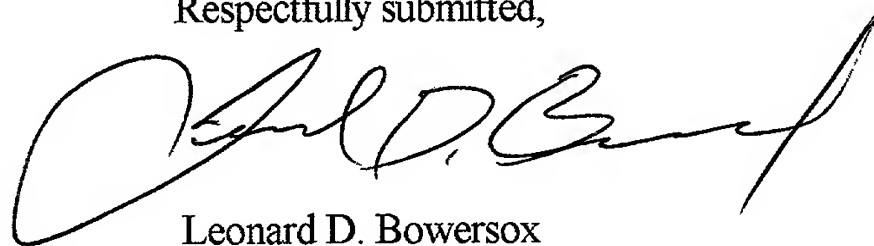

Leonard D. Bowersox
Reg. No. 33,226

Atty. Dkt. No.: 5020-002
KILYK & BOWERSOX, P.L.L.C.
3603-E Chain Bridge Road
Fairfax, VA 22030
Tel: (703) 385-9688
Fax: (703) 385-9719

Enclosure: Appendix - Marked-up Version of the Claims

APPENDIX - MARKED-UP VERSION OF THE CLAIMS

Please amend claims 4, 6, 7, and 10-17 as follows:

4. An abrasive flap disc as claimed in [any preceding claim] claim 1, wherein the angle between the backing plate and each flap is in the range of approximately 20° to approximately 90°.

6. An abrasive flap disc as claimed in [any preceding claim] claim 1, wherein a centerline of each flap, which extends between its radially inner and outer edges, is substantially on a radius of the backing plate.

7. An abrasive flap disc as claimed in claim 1[to 5], wherein the centerline of each flap, which extends between its radially inner and outer edges, is at an angle relative to a radius of the backing plate.

10. An abrasive flap disc as claimed in [any preceding claim] claim 1, wherein the flaps comprise abrasive grit bonded to a backing material.

11. An abrasive flap disc as claimed in [any preceding claim] claim 1, wherein the backing plate includes means to attach the disc to a drive mechanism.

12. A method of producing an abrasive flap disc of the type set out in claim 1, comprising the steps of:

providing a backing plate;

providing an adhesive on an upper surface of the backing plate;

rotating the backing plate incrementally;

at each incremental step, feeding the end of a strip of abrasive material on to the adhesive on the backing plate;

severing the end of the strip to form a flap;

repeating the process until an annular array of flaps is formed on the backing plate with each flap, at least in a radially outer region, being spaced from each adjacent flap;

maintaining the flaps in spaced [positioned] position; and

curing the adhesive to secure the flaps to the backing plate.

13. A method of producing an abrasive flap disc as claimed in claim 12, wherein after constructing the array of flaps and before curing, the method further includes the step of placing the disc in a former adapted to prevent each flap from falling into substantial contact with an adjacent flap.

14. A method of producing an abrasive flap disc as claimed in claim 13, wherein the former includes a cylindrical wall dimensioned to encircle the disc and prevent each flap from falling into substantial contact with an adjacent flap.

15. A method of producing an abrasive flap disc as claimed in [claims 13 or 14] claim 13, wherein a spoke-shaped frame is placed with a spoke positioned between adjacent flaps to prevent each flap from falling into substantial contact with an adjacent flap.

16. A method of producing an abrasive flap disc as claimed in [any of claims 12 to 15] claim 12, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially inner to outer edge and which is substantially on a centerline of the backing plate.

17. A method of producing an abrasive flap disc as claimed in [any of claims 12 to 15] claim 12, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially inner to outer edge and which is at an angle relative to a radius of the backing plate.

Please add new claims 18-20 as follows:

--18. A method of producing an abrasive flap disc, comprising the steps of:

- providing a backing plate;
- providing an adhesive on an upper surface of the backing plate;
- rotating the backing plate incrementally;
- at each incremental step, feeding the end of a strip of abrasive material on to the adhesive on the backing plate;
- severing the end of the strip to form a flap;
- repeating the process until an annular array of flaps is formed on the backing plate with each flap, at least in a radially outer region, being spaced from each adjacent flap;
- maintaining the flaps in spaced position; and

curing the adhesive to secure the flaps to the backing plate.

19. A method of producing an abrasive flap disc as claimed in claim 18, wherein after constructing the array of flaps and before curing, the method further includes the step of placing the disc in a former adapted to prevent each flap from falling into substantially contact with an adjacent flap.

20. A method of producing an abrasive flap disc as claimed in claim 18, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially inner to outer edge and which is at an angle relative to a radius of the backing plate.--

ABRASIVE FLAP DISC

The invention relates to abrasive flap discs which are used for a variety of finishing, grinding and polishing operations, particularly on welded fabrications.

Generally, flap discs comprise a relatively stiff backing plate onto which abrasive flaps are adhered. The backing plate can be angled, flat, depressed, raised, or a combination of these variations. They are typically 4"-9" (10.16cm-22.86cm) in diameter, although smaller diameter discs are being introduced. The abrasives used are ordinarily 24-120 grit.

There are alternatives to flap discs, such as Depressed Centre (resin bonded) Grinding Wheels (DCGWs). However, these are only suitable for removing large amounts of material and generally can not provide suitable finishing. Thus, the use of Sanding Discs (SDs) is required subsequent to the grinding operation. Unlike these two aforementioned counterparts, flap discs are multi-purpose, this being partly attributable to the fact that the surface operation performed by them is somewhat dependent upon the pressure applied by the operator.

Furthermore, the superior properties of flap discs over DCGWs are attributable to the fact that flap discs use coated abrasives (unlike bonded abrasives for a DCGW), which inherently present the majority of the abrasive grit particles at their optimum cutting attitude whilst providing a potentially "softer" operation, removing material at a variable rate dependent upon the pressure applied and

- 2 -

contributing to an improved surface finish. Flap discs are also considered superior to SDs due to the use of multi-layer coated abrasives, which provide a substantially greater amount of useable abrasive cloth, in the region of 20:1, to provide a substantially longer life for the flap discs.

Although flap discs are "softer" than DCGWs, flap discs are still "hard", particularly when finer grit sizes are used, and as such do not lend themselves to contouring or blending work. There have been moves to develop flap discs which are "softer", but these have concentrated on providing a backing plate with reduced stiffness, e.g. Zircotex (RTM). In such cases, this has not been wholly successful as the necessary combination of a "flexible" disc and "support pad" have proved to be too rigid. Thus, the operational range of these flap discs are significantly limited. Moreover, the configuration of flap discs prevents them from being capable of dressing sharp corners.

The present invention provides an abrasive flap disc comprising a backing plate, an annular array of flaps of abrasive material arranged on the backing plate and bonded thereto along the lowermost edge of each flap, wherein each flap, at least in a radially outer region, is substantially spaced from each adjacent flap such that the flaps have freedom to flex and conform to an underlying surface in use.

Preferably, each flap does not contact an adjacent flap at all. Alternatively, each flap contacts an adjacent flap along its radially inner edge.

- 3 -

Preferably, the angle between the backing plate and each flap is in the range of approximately 20° to approximately 90° . Advantageously, the angle between the backing plate and each flap is in the range of approximately 40° to approximately 70° .

In one embodiment, the abrasive flaps of the disc may be arranged such that a centerline of each flap, which extends between its radially inner and outer edges, is substantially on a radius of the backing plate.

Alternatively, the centerline of each flap may be at an angle to a radius of the backing plate. Advantageously, the angle between each flap centerline and a radius of the backing plate is in the range of approximately between 5° to approximately 85° . Most preferably, the angle between each flap centerline and a radius of the backing plate is in the range of approximately between 30° to approximately 60° .

Preferably, the flaps comprise abrasive grit bonded to a backing material and the backing plate includes means to attach the disc to a drive mechanism.

The invention further provides a method of producing an abrasive flap disc of the type described above, comprising the steps of providing a backing plate; providing an adhesive on an upper surface of the backing plate; rotating the backing plate incrementally; at each incremental step, feeding the end of a strip of abrasive material on to the adhesive on the backing plate; severing the end of the strip to form a flap; repeating the process until an annular

array of flaps is formed on the backing plate with each flap, at least in a radially outer region, being spaced from each adjacent flap; maintaining the flaps in the spaced position; and curing the adhesive to
5 secure the flaps to the backing plate.

Preferably, after constructing the array of flaps and before curing, the method further includes the step of placing the disc in a former adapted to
10 prevent each flap falling into substantial contact with an adjacent flap.

The former may include a cylindrical wall dimensioned to encircle the disc and prevent each flap
15 falling into substantial contact with an adjacent flap. Alternatively, a spoke-shaped frame may be placed with a spoke positioned between adjacent flaps to prevent each flap falling into substantial contact with an adjacent flap.

20 In one embodiment, the strip of abrasive material is fed such that each flap has a centerline extending from its radially inner to outer edge which is substantially on a centerline of the backing plate.

25 Alternatively, the strip of abrasive material may be fed such that each flap has a centerline extending from its radially inner to outer edge which is at an angle to a radius of the backing plate.

30 The invention therefore provides flap discs having an arrangement of abrasive flaps which give the flaps pliability and increased freedom to flex and conform to an underlying surface, thereby increasing
35 the applicability of flap discs whilst maintaining

- 5 -

sufficient support for the abrasive flaps such that the operational range of the abrasive flap discs is also maintained. Specifically, the flap disc operator can use a single tool to perform a number of functions, efficiently controlling the operation performed by the pressure and angle of approach applied to the tool. Moreover, the arrangement of abrasive flaps provided is still sufficiently stiff such that the grinding of particularly rough surfaces is possible. In particular, the flap discs of this invention can be used in contour and blending work, and also to dress sharp corners.

It is recognised that there are other processes for the manufacture of flap discs which differ in specific ways from the normal process referred to above. However the invention is valid regardless of how the cloth and flaps are presented, cut or adhered to the backing plate.

The invention will now be described in detail, by way of example only, with reference to the following drawings in which :

Figure 1 is a plan view of a typical flap disc;

Figure 2 is a side view of the flap disc of Figure 1;

Figure 3 is plan view of a flap disc in accordance with one embodiment of the present invention, in which the centerlines of the abrasive flaps are aligned with radii of the backing plate;

Figure 4 is a side view of the flap disc of

- 6 -

Figure 3;

5 Figure 5 is a plan view of a flap disc in accordance with a second embodiment of the present invention, in which the centerlines of the abrasive flaps are arranged at an angle to radii of the backing plate;

10 Figure 6 is a side view of the flap disc of Figure 5;

15 Figure 7 is a plan view of a former used in the manufacturing process of the flap disc of the present invention; and

Figure 8 is a cross sectional view through the former of Figure 7 along line X-X.

20 As can be seen from Figures 1 and 2, current flap discs 10 comprise a backing plate 11 around the perimeter of which are arranged abrasive flaps 12. In addition, the backing plate 11 comprises a central hole 13, which is used to locate the flap disc 10 to a drive mechanism (not shown). Of course, the hole 13
25 can be used to locate the flap disc 10 on any suitably sized guide pin e.g. during manufacture or storage, allowing several flap discs 10 to be stacked one upon another. The backing plate 11 may comprise a projection 40 (in addition to or instead of a hole 13)
30 on the reverse side of the backing plate 11 to allow connection to the drive mechanism.

Although the backing plate 11 is shown to be flat in Figure 2, the backing plate 11 can be a variety of
35 shapes including inclined from the central hole 13.

- 7 -

depressed or raised around the central hole 13, or some combination of these.

5 The abrasive flaps 12 themselves comprise an abrasive grit applied to a backing material such as denim. Generally, the abrasive flaps 12 are rectangular in shape and are attached along one edge to the backing plate 11 using a single epoxy adhesive 14. The abrasive flaps 12 are usually cut to size
10 from a long strip of material during manufacture of the flap disc 10.

15 Current practice is to apply the adhesive 14 onto the backing plate 11 over the region on which the abrasive flaps 12 will be positioned. The backing plate 11 is then rotated incrementally, and at each increment the end of a long strip of abrasive material is fed at an angle onto the glued region of the
20 backing plate 11, and the end part is then cut off to form a single flap. This process is repeated until the required number of flaps 12 have been applied to the backing plate 11.

25 Typically, this semi-manufactured abrasive flap disc 10 is then stacked upon another semi-manufactured abrasive flap disc 10. On occasion, a former may be used to separate the two semi-manufactured abrasive discs 10. The former is generally a disc of material which mirrors the contour of the required abrasive
30 face of the disc, and is used to apply a restraining pressure over part or the entire area over which the abrasive flaps 12 have been arranged. In particular, formers can be particularly useful when the outer face of the abrasive flaps 12 are required to be at a
35 different angle to the angle of the back face of the

- 8 -

backing plate 11.

5 The purpose of stacking the semi-manufactured
flaps discs 10 is to flatten each of the abrasive
flaps 12 onto one another so that the back surface of
each abrasive flap 12 rests upon the front abrasive
surface of each corresponding adjacent abrasive flap
12. Any suitable means which produce such flattened
abrasive flaps 12 can be employed e.g. not just by
10 stacking but by applying external pressure to each of
the individual flap discs 10.

15 Once flattened, the stack of abrasive discs 10 is
normally placed into an oven to cure the epoxy 14 such
that it binds the abrasive flaps 12 in the flattened
position onto the backing plates 11.

20 Current practice is to arrange the flaps 12 such
that their respective centerlines are aligned with
radii of the backing plate 11. This produces a square
hard edge which is desirable in some operations.

25 It is clear that, if a larger number of flaps 12
is to be applied to the flap disc 10, then the flaps
12 will be increasingly upright. However, the flaps
12 are always flattened as far as possible so as to
rest upon one another.

30 In contrast, flap discs 20 in accordance with two
embodiments of this invention are shown in Figures 3-
6. The flaps 12 are positioned substantially upright
such that there are significant gaps 15 between the
abrasive flaps 12. Preferably, in the abrasive flap
discs 20 of the present invention, the angle between
35 the backing plate 11 and abrasive flap 12 is between

20°-90°. More specifically, the angle between the backing plate 11 and abrasive flap 12 is between 40°-70°. With conventional flap discs, the angle of the flaps relative to the backing plate depends upon the number of flaps, as referred to above. With the flap discs of the present invention, however, the flaps are spaced from one another and hence the angle between the flaps and the backing plate is not dictated by the number of flaps.

10

Generally, each adjacent flap 12 does not rest upon its neighbour at all. However, it may be useful to arrange the flaps 12 such that adjacent flaps 12 do touch one another along their respective inner edges 16. This provides some support for the flaps 12 during curing. This contact can of course be line or point contact.

15

This relatively upright, open, arrangement of flaps 12 gives the flaps 12 increased flexibility, particularly at the outer periphery of the flap disc 20, and allows the flaps 12 to conform to an underlying surface in use. Thus, the operator is provided with the ability of aggressive, heavy cutting or light contour blending. It is therefore suitable to dress sharp corners, and can be used also for blending and contouring work.

20

25

As mentioned above, conventional flap discs 10 are manufactured with the flap centre line, which extends radially from the inner edge 16 to outer edge 17 of the flap 12, lying approximately on a diameter of the disc 10 (as best seen in Figure 1). In the first embodiment of the present invention, shown in Figures 3 and 4, the flaps 12 are also positioned in

30

35

- 10 -

this way.

Alternatively, in a second embodiment, shown in Figures 5 and 6, the flaps 12 are displaced such that the flap centre line lies at an angle to a radius of the disc. This helps to provide an arrangement of self supporting flaps in which the inner edge 16 of each flap rests on its neighbour. Thus, the flaps 12 of this arrangement can be cured without the need for a former (described below) to hold the flaps 12 up. Preferably, in the abrasive flap discs 20 of the current invention, the angle between the flap centerline and the radius of the backing plate is between 5°-85°. More specifically, the angle between the flap centerline and the radius of the backing plate is between 30°-60°. This feature of the invention provides an additional benefit to the product, which is the resulting generation of angle γ (see Figure 6) which provides the added facility to dress and blend sharp internal corners.

The flap discs 20 of the present invention may be manufactured using a similar process to that described above for conventional flap discs, except that adjacent flaps 12 are not flattened onto one another. Following arrangement of the appropriate number of abrasive flaps 12 onto the backing plate 11, the flaps 12 are left in a substantially upright position, spaced from one another (except perhaps along their inner edges 16). The semi-manufactured flap discs 20 may then be placed directly into ovens to cure the adhesive 14, or they may be placed in specially designed formers 30 (shown in Figures 7 and 8) to keep the abrasive flaps 12 upright and spaced apart. These formers 30 also function to enable stacking of a

- 11 -

number of flap discs 20.

5 The formers 30 are typically made from pressed steel or aluminium, but can be made from a variety of different materials e.g. those materials which have sufficient stiffness, which can be easily and cost effectively manufactured into the required shapes, and/or which have appropriate heat resistant and thermal expansivity properties. A particular
10 embodiment of a former 30 is illustrated in Figures 7 and 8, and shows a former 30 having a cylindrical wall 31 dimensioned to encircle the abrasive flap discs and support the flaps.

15 During manufacture, the projection 40 of the backing plate 11 can be placed in the centre hole 33 of the former and thus locates the semi-manufactured flap disc 20 within the former 30. In such a position, contact between the former side wall 31 and
20 the outer edges 17 of the flaps 12 provides support for flaps 12. In addition, the height of the side wall 31 is greater than the height of the flap disc 20 and is therefore sufficient to allow stacking of a number of semi-manufactured flap discs 20 contained
25 within their respective formers 30. It is important that pressure must not be applied to the top edge 18 of the flaps 12 such that they become flattened. For additional support, a substantially spoke-shaped frame (not shown) could be appropriately positioned in the
30 former 20, with spokes protruding into the gaps 15, between adjacent flaps 12, so as to support the flaps 12 during curing and prevent them falling back into contact with adjacent flaps. Formers with different configurations can be used so long as they perform the
35 above mentioned functions.

- 12 -

5 In summary, the process used to produce flap discs in accordance with this invention holds the flaps up and thus provides abrasive flaps which are substantially upright, with gaps or openings between the adjacent flaps. The flap discs of the present invention are more flexible than conventional discs, enabling them to be used in contour and blending work, and also to dress into sharp corners, and thus increases the usefulness of flap discs.

10

CLAIMS:

1. An abrasive flap disc comprising :

a backing plate,

5 an annular array of flaps of abrasive material arranged on the backing plate and bonded thereto along the lowermost edge of each flap,

10 wherein each flap, at least in a radially outer region, is substantially spaced from each adjacent flap such that the flaps have freedom to flex and conform to an underlying surface in use.

2. An abrasive flap disc as claimed in claim 1,

15 wherein each flap does not contact an adjacent flap at all.

3. An abrasive flap disc as claimed in claim 1,

20 wherein each flap contacts an adjacent flap along its radially inner edge.

4. An abrasive flap disc as claimed in any preceding claim, wherein the angle between the backing plate and each flap is in the range of approximately 20° to approximately 90°.

25 5. An abrasive flap disc as claimed in claim 4, wherein the angle between the backing plate and each flap is in the range of approximately 40° to approximately 70°.

30 6. An abrasive flap disc as claimed in any preceding claim, wherein a centerline of each flap, which extends between its radially inner and outer edges, is substantially on a radius of the backing plate.

- 14 -

7. An abrasive flap disc as claimed in claim 1 to 5, wherein the centerline of each flap, which extends between its radially inner and outer edges, is at an angle to a radius of the backing plate.

5

8. An abrasive flap disc as claimed in claim 7, wherein the angle between each flap centerline and a radius of the backing plate is in the range of approximately between 5° to approximately 85°.

10

9. An abrasive flap disc as claimed in claim 8, wherein the angle between each flap centerline and a radius of the backing plate is in the range of approximately between 30° to approximately 60°.

15

10. An abrasive flap disc as claimed in any preceding claim, wherein the flaps comprise abrasive grit bonded to a backing material.

20

11. An abrasive flap disc as claimed in any preceding claim, wherein the backing plate includes means to attach the disc to a drive mechanism.

25

12. A method of producing an abrasive flap disc of the type set out in claim 1, comprising the steps of :

providing a backing plate;

providing an adhesive on an upper surface of the backing plate;

rotating the backing plate incrementally;

30

at each incremental step, feeding the end of a strip of abrasive material on to the adhesive on the backing plate;

severing the end of the strip to form a flap;

repeating the process until an annular array of

35

flaps is formed on the backing plate with each flap

- 15 -

at least in a radially outer region, being spaced from each adjacent flap;

maintaining the flaps in spaced positioned; and
curing the adhesive to secure the flaps to the
5 backing plate.

13. A method of producing an abrasive flap disc as claimed in claim 12, wherein after constructing the array of flaps and before curing, the method further
10 includes the step of placing the disc in a former adapted to prevent each flap falling into substantial contact with an adjacent flap.

14. A method of producing an abrasive flap disc as
15 claimed in claim 13, wherein the former includes a cylindrical wall dimensioned to encircle the disc and prevent each flap falling substantial contact with an adjacent flap.

15. A method of producing an abrasive flap disc as
20 claimed in claims 13 or 14, wherein a spoke-shaped frame is placed with a spoke positioned between adjacent flaps to prevent each flap falling into substantial contact with an adjacent flap.

25 16. A method of producing an abrasive flap disc as claimed in any of claims 12 to 15, comprising the step of feeding the strip of abrasive material such that each flap has a centerline extending from its radially
30 inner to outer edge which is substantially on a centerline of the backing plate.

17. A method of producing an abrasive flap disc as
35 claimed in any of claims 12 to 15, comprising the step of feeding the strip of abrasive material such that

- 16 -

each flap has a centerline extending from its radially inner to outer edge which is at an angle to a radius of the backing plate.

FIG. 1

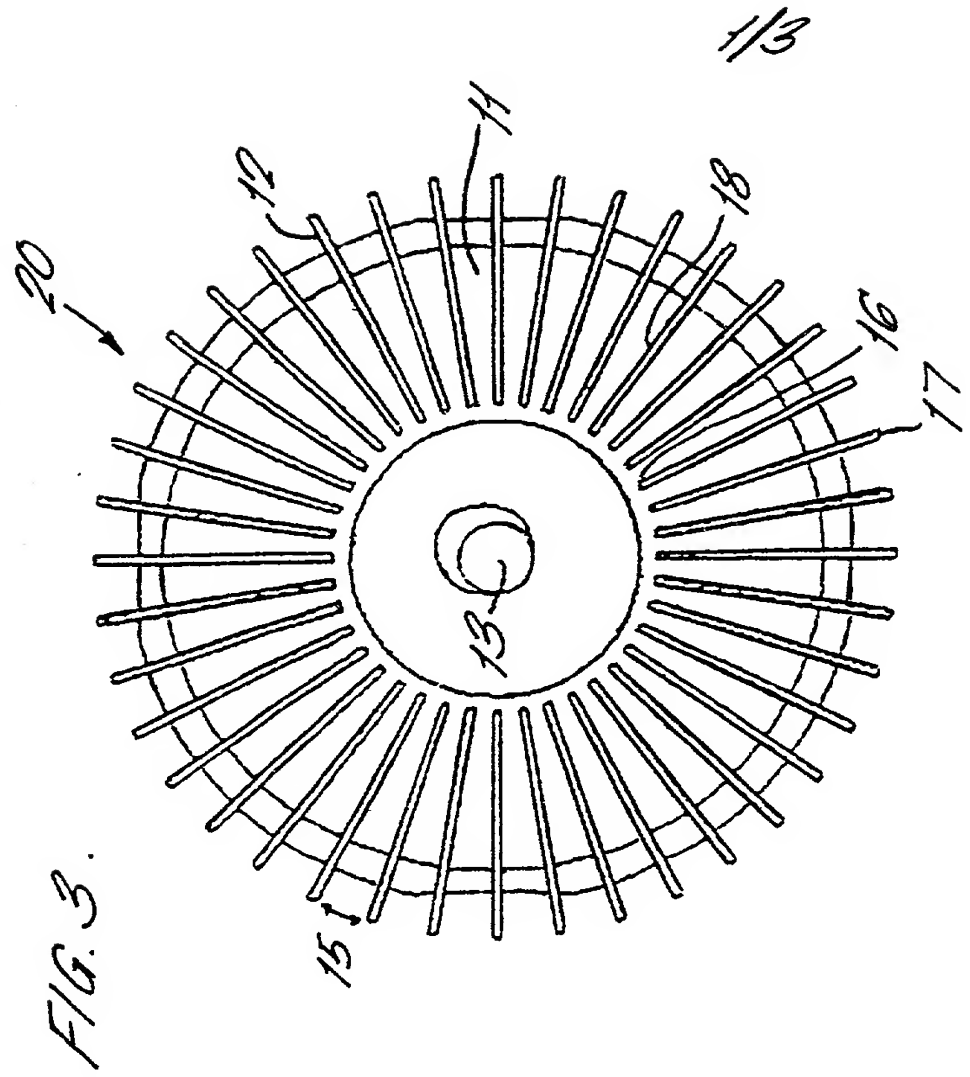
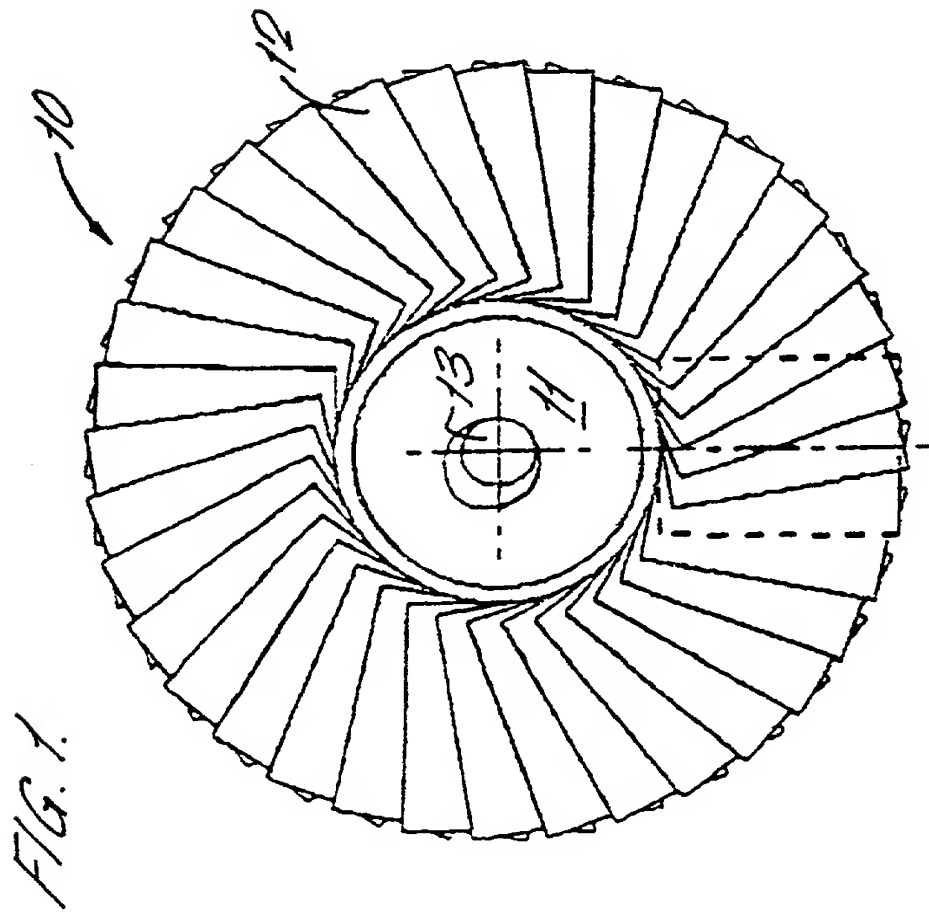


FIG. 4.


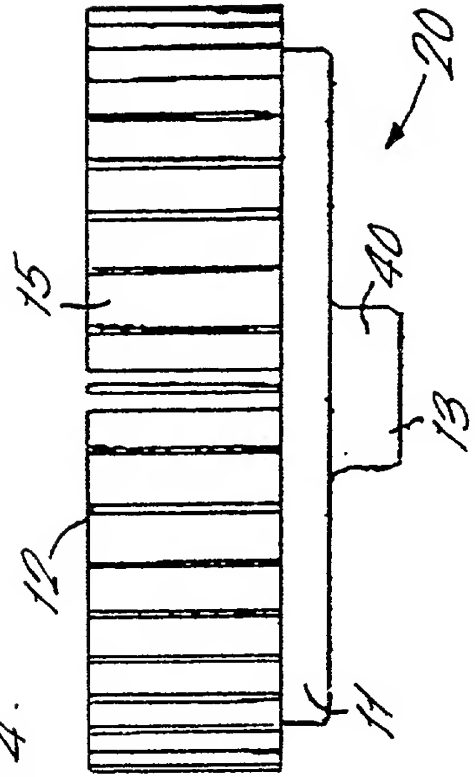


FIG. 2.

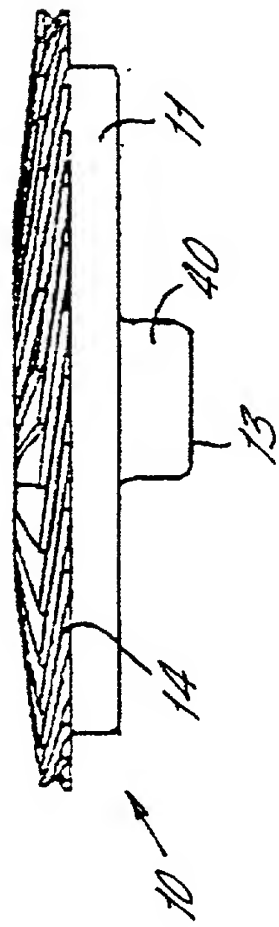

2/3


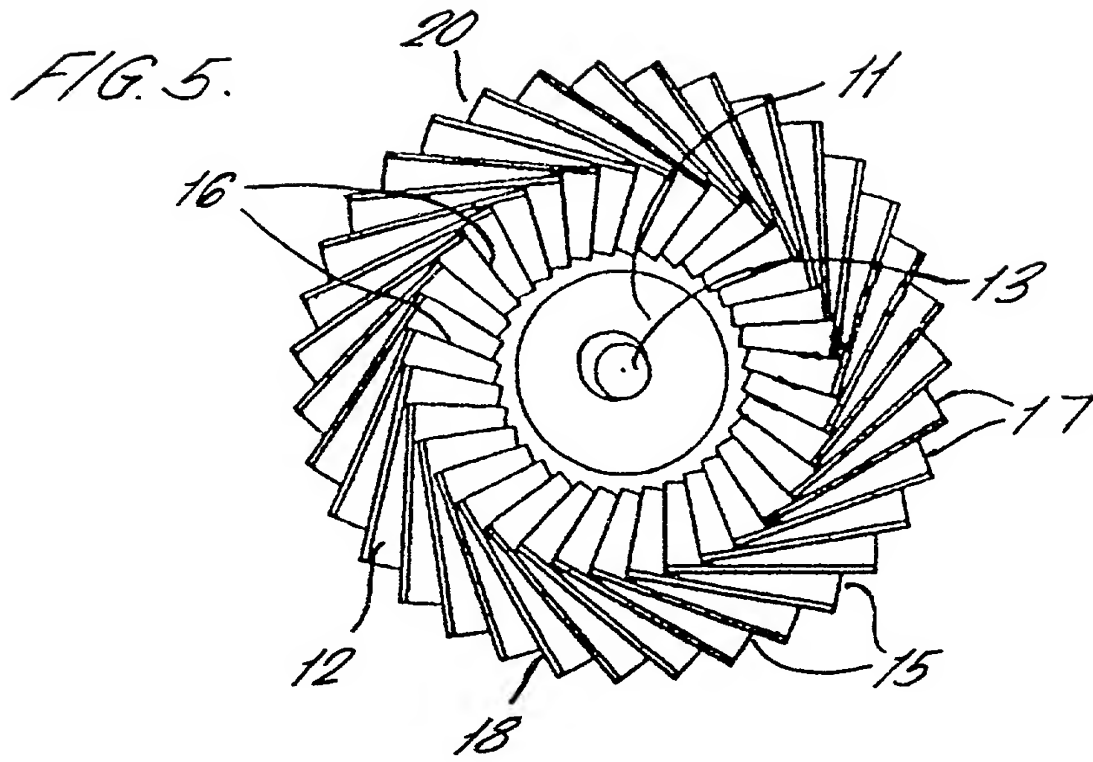


FIG. 6.

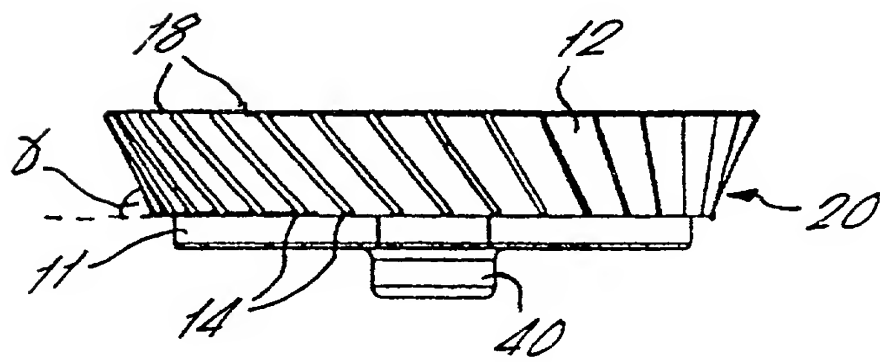

3/3


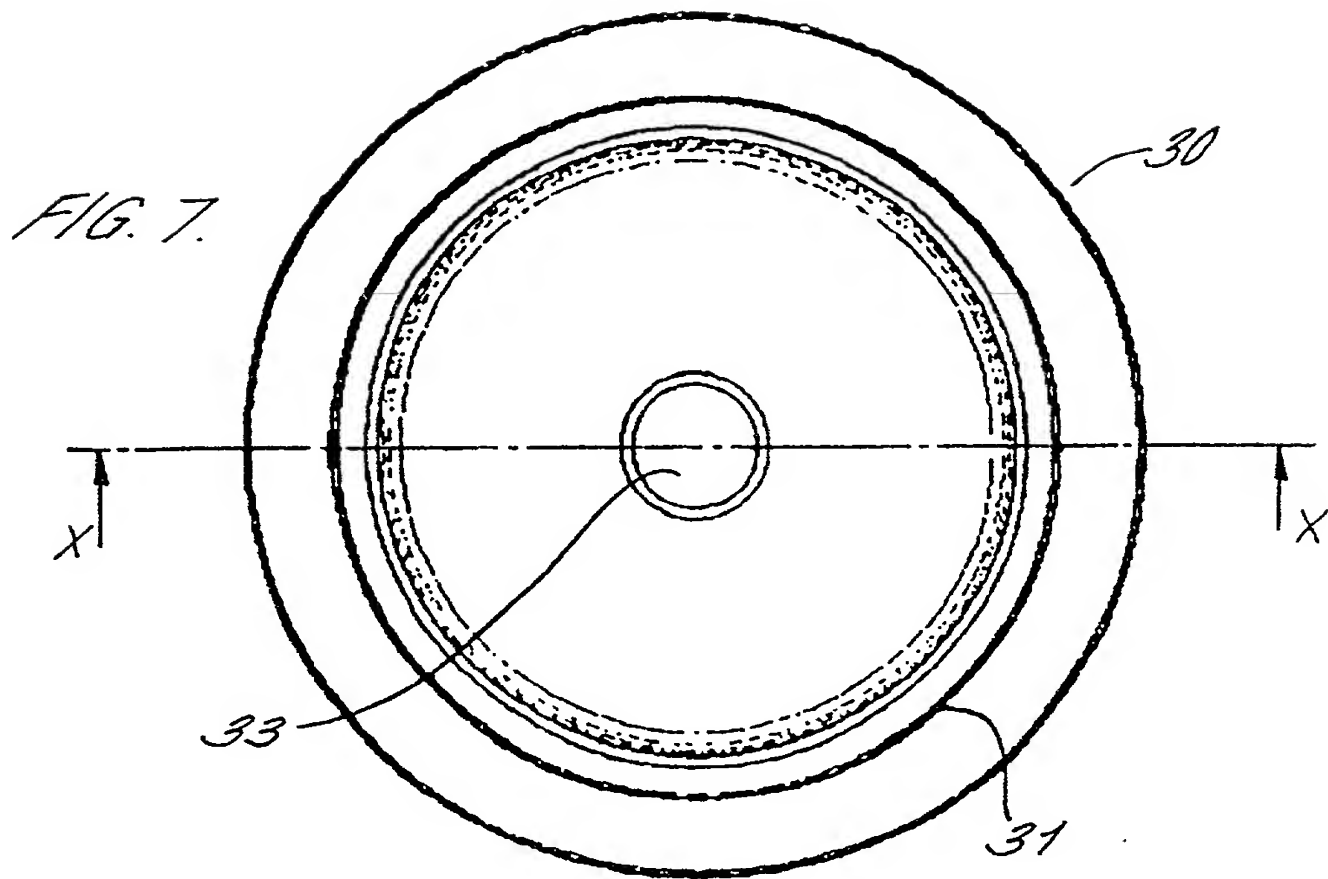


FIG. 8.

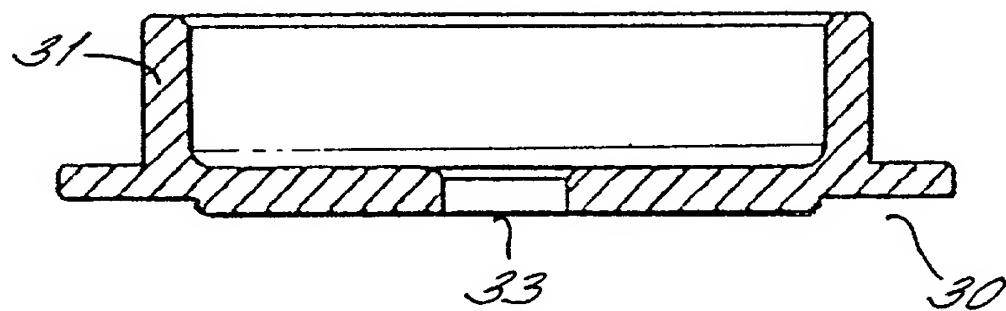

Declaration for U.S. Patent Application

As a below named inventor, We hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names.

We believe We are the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMPROVEMENTS IN OR RELATING TO ABRASIVE FLAP DISCS, the specification of which is attached hereto unless the following is checked

- ☐ was filed on _____, as United States Application Number _____ and
- ☐ was amended on _____ (if applicable).

We hereby state that We have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, § 119 (a) - (d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application for which priority is claimed:

(List prior foreign applications.)	9909468.2	UK	23 April 1999	Priority Claimed
	(Number)	(Country)	(Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
	_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
	_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

See attached list for additional prior foreign applications

We hereby claim the benefit under Title 35, United States Code, § 120 or § 119(e) of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, We acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(List Prior U.S. Applications)	(Appln. Serial No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)
	_____	_____	_____
	_____	_____	_____
	_____	_____	_____

We hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

2 Leonard D. Bowersox, Reg. No. 33,226; and
Luke A. Kilyk, Reg. No. 33,251

Please direct all communications to the following address: Leonard D. Bowersox, Esq.
KILYK & BOWERSOX, P.L.L.C.
3603-E Chain Bridge Road
Fairfax, VA 22030
Telephone: (703) 385-9688 Fax: (703) 385-9719 or (703) 385-9747

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.
(See note C above)

Full name of first inventor (given name, family name) 100 PAUL MOSIER
Inventor's signature *P. Mosier* Date 28th August 2001
Residence 17 Leicester Road, Measham, Citizenship UK
Swadlincote, Derbyshire DE12 7JG
Post Office Address Same as above

Full name of second inventor (given name, family name) _____
Inventor's signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address Same as above

Full name of third inventor (given name, family name) _____
Inventor's signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address Same as above

Full name of fourth inventor (given name, family name) _____
Inventor's signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address Same as above